

HEWLETT-PACKARD COMPANY

Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80527-2400

PATENT APPLICATION

ATTORNEY DOCKET NO. 10005131-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design☒ original patent application,☐ continuation-in-part application

INVENTOR(S): David L. Smith et al

TITLE: Pointing Device With A Cable Storage Winding Mechanism

Enclosed are:

- ☒ The Declaration and Power of Attorney. ☒ signed ☐ unsigned or partially signed
☒ 10 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☒ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ (Other) (fee \$)

| CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY | | | | |
|--|---------------------|---------------------|-------------|---------------|
| (1) FOR | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE | (5) TOTALS |
| TOTAL CLAIMS | 28 — 20 | 8 | X \$18 | \$ 144 |
| INDEPENDENT CLAIMS | 7 — 3 | 4 | X \$80 | \$ 320 |
| ANY MULTIPLE DEPENDENT CLAIMS | 0 | | \$270 | \$ 0 |
| BASIC FEE: Design (\$320.00); Utility (\$710.00) | | | | \$ 710 |
| TOTAL FILING FEE | | | | \$ 1,174 |
| OTHER FEES | | | | \$ |
| TOTAL CHARGES TO DEPOSIT ACCOUNT | | | | \$ 1,174 |

Charge \$ 1,174 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL49605298US

Date of Deposit Oct 30 2000

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Commissioner for Patents, Washington, D.C. 20231.

By Donald J. Coulman
Typed Name: Donald J. Coulman

Respectfully submitted,

David L. Smith et al

By

Curtis G. Rose

Attorney/Agent for Applicant(s)

Reg. No. 32,057

Date: Oct 30 2000

Telephone No.: (541) 715-8442

5

POINTING DEVICE WITH A CABLE STORAGE WINDING MECHANISM

BACKGROUND OF THE INVENTION

10

This invention relates generally to pointing devices for an electronic device such as a computer, and more particularly to a manually controlled pointing device for generating data for pointing to such an electronic device. This data is typically used to change the appearance of a display screen. More particularly, the present invention relates to a pointing device having a windable cable storage mechanism within the housing of the mouse.

15

A computer mouse is a common pointing device used to generate signals for control of a cursor or reference point on a computer display. A computer mouse often includes one or more buttons or switches which can either be dedicated or programmed to correspond to a specific command function (e.g. "click" to select a display icon, "double click" to open the item associated with the display icon, display a menu item, or provide some custom function). A computer mouse, in addition, often includes a cable for transmitting signals to the display, typically via a computer. Other common pointing devices include a trackball, touchpad device, and a joystick. Each of these devices also controls the movement of a cursor on a computer display screen, and typically includes buttons for entering specific functions, and a cable for transmitting data to the microprocessor.

20

25

30

Portable computers, such as laptops, notebooks, hand held and palm top computers, have become quite popular. People are increasingly using portable computers while traveling. In most cases these portable computers contain one or more pointing devices such as, a built in mouse, or a touchpad device, or small joystick, commonly referred to as a pointing stick. Many users find these devices on

portable computers to be less than optimal. The small size tends to make them very sensitive to movement, which creates difficulty in easily controlling the movement of the cursor compared to the size of a pointing device found with a desktop computer. They are also typically unfamiliar to desktop personal computer users. Therefore, many users carry a separate, full size computer mouse with them while traveling to use with the portable computer. This leads to the undesired effect of having to store the computer mouse in a carrying case, which takes up scarce space. Typically, the computer user winds the cable against itself in a more manageable length using a rubber band or tie to prevent the cable from unraveling. In other cases, the user simply wraps the cord around the computer mouse, again using a rubber band or tie to prevent the cable from unraveling or slipping off the computer mouse. Since many computer mice have rounded edges, corners, and gently sloping contours for ergonomic purposes, keeping a cable wrapped around a mouse is difficult. The use of a computer mouse in this manner leads to a bulky, cumbersome and unorganized object which is less than optimal when traveling. Further, this crude storage manner lends itself to dirt coming into contact with the cable connector during storage, which can result in interference with the connection or transmission of data.

Storage is not the only issue confronting computer users while traveling. Many users operate their computers, while traveling, in cramped and confined spaces such as during flights, on trains, or in hotel rooms. In these situations, the cord of a full size computer mouse can become easily entangled on another object, such as an airline seat tray, thus making the mouse difficult to operate.

To address these issues, Shape Technologies has recently introduced under the name "Mouse with no tail," a computer mouse which has a cable winding mechanism built into the mouse. This device utilizes a standard opto-mechanical tracking device along with two switches and a flat multi-wire unshielded cable. The cable winding mechanism in this device is a two-spool system requiring two distinct and separate spools mounted on top of each other with approximately equal lengths of cable. For example, three feet of cable external to the mouse requires approximately three feet of cable on the second spool remaining inside the mouse at all times. With the two spool system the limit in the length of wire which can be external to the mouse is

determined by this second spool; that is, the longer the length of cable desired to be external to the mouse, the larger the second spool must be. Thus approximately half of the total volume available for storage is used by the length of cable that remains within the mouse body and is not available to the user. This can be quite
5 disadvantageous where space is limited.

Fig. 1 shows a perspective view of a two spool system. Fig. 1a shows the lower spool with the cable fully unwound. In this state the upper spool is in its most tightly wound state. Fig. 1b shows the lower spool with the cable almost fully wound and the upper spool of cable is almost fully unwound. Another disadvantage of a two-
10 spool system is that two sharp bends in the flat cable at approximately 90 degrees are used in order to connect the upper spool of cable to the lower spool of cable. This limits the type of cable that can be used and makes the cable more prone to breakage at this point.

Another disadvantage of this device is that the winding mechanism is accessed
15 through the bottom of the mouse, which may result in the pick-up of dirt or lint during operation. This may make it difficult or impossible for the user to unwind the cable from the mouse or wind it back into the mouse, defeating the purpose of the cable winding mechanism, and perhaps rendering the mouse itself inoperable.

SUMMARY OF THE INVENTION

A pointing device, which is capable of changing the appearance of a display, includes a housing made up of a cover and a base, a single spool cable receiver rotatably mounted to the housing, and a cable having a first end and a second end with the second end mounted to the cable receiver. The pointing device has a first mode with a
25 first portion of the cable having a first length external to the pointing device and a second portion of the cable wound around the cable receiver. The pointing device also has a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a perspective view of a prior art two spool system with the cable fully unwound;

Fig. 1b is a perspective view of a prior art two spool system with the cable
5 fully wound;

Fig. 2 is a diagram of a pointing device coupled to a display according to an embodiment of this invention;

Fig. 3a is a diagram of a pointing device in a first mode according to an embodiment of this invention;

10 Fig. 3b is a diagram of a pointing device in a second mode according to an embodiment of this invention;

Fig. 3c is a diagram of a pointing device in third mode according to an embodiment of this invention;

15 Fig. 4a is a top view of a pointing device according to an embodiment of this invention;

Fig. 4b is a bottom view of an pointing device according to an embodiment of this invention;

Fig. 4c is a cross-sectional view of an pointing device according to an embodiment of this invention;

20 Fig. 4d is an expanded cross-sectional view of the detent and reference stop according to an embodiment of this invention.

Fig. 4e is a top view of the detent according to an embodiment of this invention;

25 Fig. 4f is a bottom view of the reference stop according to an embodiment of this invention;

Fig. 5a is a top view of a pointing device according to an embodiment of this invention;

Fig. 5b is a cross-sectional view of a pointing device according to an embodiment of this invention;

30 Fig. 5c is a cross-sectional view of a rotary connector according to an embodiment of this invention;

Fig. 5d is an end view of pointing device 10 according to an embodiment of this invention;

Fig. 6a is a top view of a pointing device according to an embodiment of this invention;

5 Fig. 6b is a cross-sectional view of a pointing device according to an embodiment of this invention;

Fig. 6c is a face view of an encoder wheel according to an embodiment of this invention;

10 Fig. 6d is an enlarged view of an encoder wheel according to an embodiment of this invention.

DETAILED DESCRIPTION

Referring to Fig. 2 pointing device 10 is used with display 14 to control the movement of cursor 16 or other reference displayed on display 14. Pointing device 10 includes tracking device 20, one or more switches 22, and cable receiver 24, all contained within housing 30, and cable 18 providing a communication interface between pointing device 10 and display 14 typically via computer 12. Cable receiver 24 is rotatably mounted to housing 30. Switches 22 are preferably capacitively coupled to cable receiver 24 providing a rotatable non contact electrical connection to cable 18. Although other types of cable can be used, it is preferable that cable 18 is a shielded cable. Signals generated by tracking device 20 and switches 22 are sent to display 14 through the communication interface using a prescribed protocol. These signals can either be sent directly to display 14 if it contains a processor or other means capable of utilizing the signals, or indirectly via computer 12. Cable receiver 24 is formed to accept cable 18 by winding cable 18 about cable receiver 24. This provides a compact device capable of storing cable 18 without the need, for a rubber band or tie to keep cable 18 in place.

Typically, tracking device 20 consists of a mechanical, optomechanical, or optical detection system. In both mechanical and optomechanical tracking devices either a rubber or rubber coated ball is mounted inside housing 30 such that the ball protrudes slightly from the bottom surface of housing 30. The ball typically rests

against two rollers perpendicular to each other with a third spring-loaded roller that captures the ball in place. In a mechanical system movement of the ball causes sensors to send electrical signals through cable 18 to either display monitor 14 or computer 12. In optomechanical systems light-emitting diodes (LEDs) coupled to phototransistors sense movement of the ball. Optical systems have no moving parts, and typically operate by determining the direction and magnitude of movement using either: a) LEDs (2 different colors, one for each orthogonal direction) and a special reflective pad containing gridlines (spacing for each orthogonal direction optimized for each LED color), by detecting motion using light detectors; or b) by using a system which measures changes in position by optically acquiring images (frames) and mathematically determining motion.

In one embodiment tracking device 20 is an optical system that includes a sensor, lens and LED assembly manufactured by Agilent Technologies of Palo Alto, California, part numbers HDNS-2000 (Sensor), HDNS 2100 (Lens), HDNS-2200 (LED Assembly Clip) and HLMP-ED80 (High Light Output red LED). This tracking system embodiment includes no moving parts and allows tracking of device movement over any surface. In particular, an optical tracking device is preferred over a mechanical or optomechanical device housing a captured ball, because an optical based system takes up considerably less space. Although other tracking devices can be used, it is preferable that the size of the tracking system be kept minimal to allow pointing device 10 to be stored in as small a volume as practical. In addition, it is also advantageous to minimize the tracking system size to maximize the room available for the storage of cable 18. Further, an optical based tracking device allows the pointing device to be used over non-planar surfaces, thus removing a limitation of many pointing devices, the requirement to use a generally planar pad.

Referring to Fig. 3, pointing device 10 can be operated in a plurality of modes. A first mode is shown in Fig. 3a where a relatively large portion of cable 18 is external to pointing device 10 (shown as portion 18a) and thus is available to the user. In this mode (operational), pointing device 10 is connected to display 14 or computer 12 via connector 26 in a typical office or home environment. A second mode is shown in Fig. 3b where a small to non-existent portion of cable 18 is external to

pointing device 10 (shown as portion 18b). In this mode (storage), pointing device 10 is not connected to computer 12 or display 14 and a substantial portion of cable 18 is wrapped around cable receiver 24 (not shown). A third mode (intermediate) is shown in Fig. 3c, where an intermediate portion of cable 18 is external to pointing device 10 (shown as portion 18c) and thus available to the user. In this mode, pointing device 10 is typically connected to display 14 or computer 12 via connector 26. The third mode is typically used in an environment where space may be at a premium (airplane, train, hotel room etc.) and computer 12 or display 14 is in close proximity to pointing device 10.

Referring to Fig. 4a, an embodiment of pointing device 10 of the present invention in a top view with the cover removed is shown, where cable receiver 24 is rotatably mounted to base 302 through spindle 334 and spindle bracket 332. Note that in contrast to the two spool system shown in Fig. 1 cable receiver 24 is a single spool. Further in contrast to the two spool system all but a small portion of cable 18 is continuously wound or unwound from the single spool of cable receiver 24. A small portion of cable 18 is typically used to connect to tracking device 20. Cable 18 is shown partially wound around cable receiver 24. When cable 18 is fully wound around cable receiver 24, connector 26 is housed in connector receiver 360. Fig. 4a also shows rotatable disk 330 affixed to shaft 334 which is affixed to cable receiver 24 such that when rotatable disk 330 is rotated, cable receiver 24 is also rotated. A top view of rotatable disk 330 is shown in Fig. 4a in which depressions 350 and 352 are formed into the exterior surface of the top of rotatable disk 330. Depressions 350 and 352 are preferably approximately the size and shape of an average finger, but could be other shapes and sizes. The user places their finger in one of these depressions to rotate rotatable disk 330 to wind and unwind cable 18. In addition, two smaller apertures 354 and 356 are also formed into the center of depressions 350 and 352 respectively. Apertures 354 and 356 are approximately the size of a typical ball point pen tip or the tip of a typical stylus used with various personal digital assistants. The user can place either a ball point pen tip, pencil tip, stylus tip or any other suitable instrument into either circular depressions 354 or 356 to rotate rotatable disk 330 to wind and unwind cable 18.

Fig. 4a also shows switches 22 mounted on switch brackets 340. In this embodiment, the majority of cable 18 is capable of being external to pointing device 10, where majority is defined as greater than 50%. In the preferred embodiment, 85%-95% of cable 18 is capable of being unwound and external to pointing device 10. This is in sharp contrast with the prior art where less than 50% of the cable is capable of being unwound and external to the computer mouse. Fig. 4a also shows connector 26 attached to one end of cable 18. In this embodiment, the other end of cable 18 is attached to tracking device 20. When cable 18 is fully wound around cable receiver 24 connector 26 fits in connector receiver 360.

In Fig. 4b, a bottom view is shown where base 302 of housing 30 along with lens 21 and LED 19, both part of tracking device 20 are visible. Although a perfectly planar surface is not required for base 302, a substantially planar surface is desired. In this embodiment, base 302 has no openings through the base which would allow dirt or debris to get inside of pointing device 10 when in use, unlike more conventional pointing devices which utilize either opto-mechanical tracking devices or pointing devices with cable winding mechanisms which are accessed from the bottom.

Fig. 4c is a planar side view of the embodiment shown in Figs. 3a - 3b, where cover 304 encloses the top of base 302, cover 304 and base 302 make up housing 30 of pointing device 10. Cable receiver 24 is rotatably mounted to housing 30 through spindle 334 and spindle bracket 332. Spindle bracket 332 can extend either from the side or from the bottom of base 302. Cable 18 is shown partially wound around cable receiver 24. Tracking device 20 is integrally housed within cable receiver 24. In this embodiment, both the tracking mechanism and the tracking electronics which make up tracking device 20 are located within cable receiver 24 and are fully rotatable about the axis formed by spindle 334. In this embodiment, tracking device 20 is preferably an optical tracking system as described earlier. Fig. 4c also shows switch 22 mounted on switch bracket 340. Although as shown switch bracket 340 extends from the side of base 302 it is also desirable to have switch bracket 340 extend up from the bottom of base 302 or extend down from cover 304. Switch button 338 is also shown in Fig. 4c which when depressed activates switch 22 through switch activator 342. Switch button 338 together with cover 304 define the top exterior surface of housing 30 of

pointing device 10. The connection between switch 22 and cable receiver 24 is made by link 336 through capacitive coupling is also shown in Fig. 4c. An example of such capacitive coupling used to detect the change in state of a switch is described in US Patent No. 5,414,420.

Fig. 4c also shows rotatable disk 330 affixed to shaft 334 which is affixed to cable receiver 24 such that when rotatable disk 330 is rotated cable receiver 24 is also rotated. Access to rotatable disk 330 is obtained by opening lid portion 364 attached to cover 304 by hinge 344. When lid portion 364 is in an open position the user can wind and unwind cable 18 around cable receiver 24. However, those skilled in the art will appreciate that cable 18 can be wound either manually as shown or optionally spring activated with a latching mechanism. If spring activated, a spring with one end attached to the spool contained in cable receiver 24 and the other end attached to housing 30 such that the latch mechanism acts much like that of a window shade or key chain. To draw out cable 18, the user pulls on cable 18 slowly. To rewind cable 18 the user simply tugs on cable 18 to make the locking latch on the spring activated latching mechanism release. The spring rewinds cable 18 on cable receiver 24 which retracts cable 18 into pointing device 10. Those skilled in the art will appreciate that there are numerous designs that can also be utilized which fall within the scope and spirit of the present invention. Examples would be using a push button (e.g. as on a tape measure) or other manual latching mechanism to activate the rewinding of cable 18. (see U.S. Patent Nos. 5,422,957 and 5,339,461 for designs of conventional spring wound take up-reels).

Fig. 4c also shows detent 382 attached to cable receiver 24. Fig. 4d is an expanded cross sectional view of detent 382 and reference stop 384, showing detent 382 attached to cable receiver 24 by lever arm 386. Detent 382 mates with reference stop 384 formed in the bottom surface of the top portion of spindle bracket 332. With each complete turn of cable receiver 24 this mating will occur. Thus when detent 382 mates with reference stop 384 the user is provided tactile feedback that a complete revolution of cable receiver 24 has taken place. This in turn provides the user with feedback that tracking device 20 is in proper alignment with housing 30. When tracking device 20 is in proper alignment with housing 30, cursor 16 on display 14

moves in the same direction as the direction the user moves pointing device 10. For example, if the user moves pointing device 10 to the left, cursor 16 will also move to the left on display 14. This embodiment preferably contains reference stop 384 to avoid situations where cursor 16 could move in either unexpected directions or even in the opposite direction to what the user expected.

Lever arm 386 provides the proper tension to ensure detent 382 mates with reference stop 384. Those skilled in the art will readily recognize that the length, width, and thickness of lever arm 386 to a large degree control the tension or force detent 382 will exert on reference stop 384. Those skilled in the art will also readily recognize that as the size and depth of reference stop 384 increases the degree of tactile feedback also increases.

Fig. 4e is a top view of lever arm 386 showing two adjacent electrically conductive strips 388, 390. Each strip extends along the length of lever arm 386 and continues over the substantially hemispherically shaped detent 382. Reference stop 384 as shown in Fig. 4f also contains a conductive film covering the inner substantially hemispherically shaped surface of reference stop 384. When detent 382 is not mated with reference stop 384 there is no electrical connection between conductive strip 388 and conductive strip 390, acting as an open state in which pointing device 10 will either not operate or provide some other visual indicator on display 14 indicating to the user that cable receiver 24 is not aligned properly with housing 30. When detent 382 is mated with reference stop 384 there is electrical connection between conductive strip 388 and conductive strip 390 putting pointing device 10 in a closed (operational) state. The circuit components for processing this switch state information are mounted on cable receiver 24. By incorporating a switch in detent 382 and reference stop 384 the user is provided not only with tactile feedback when winding and unwinding cable 18 but also visual feedback on display 14 when tracking device 20 is not properly aligned with housing 30.

Fig. 5a shows an alternate embodiment of the present invention where rotary connector 401 is mounted to cable receiver 24 thereby providing the rotatable mounting necessary for cable receiver 24 to operate and the separation of tracking device 20 and switches 22 from cable receiver 24. In this embodiment, tracking

device 20 can be any one of the mechanical, opto-mechanical or optical tracking devices described earlier. Rotary connector 401 provides the capability of maintaining electrical coupling at a fixed point not on cable receiver 24 and still enable cable 18 windability. Also shown in Fig. 5a is connecting cable 406 which connects rotary connector 401 with tracking device 20. In this embodiment access to cable receiver 24 is provided by thumb wheel 470 shown in both Fig. 5a and 4b. Thumb wheel 470 is securely attached to cable receiver 24 such that when thumb wheel 470 is rotated cable receiver 24 is also rotated providing the ability to wind and unwind cable 18 from cable receiver 24. Thumb wheel 470 protrudes through two slots in the side of base 302. Fig. 5a also shows connector receiver 460 formed into base 302, which accepts connector 26 for use in the storage configuration. To help guide cable 18 during winding and unwinding, cable guide 462 is also formed into base 302 as shown in Fig. 5a.

Fig. 5b is a planar cross-sectional view of the embodiment shown in Figs. 4a where tracking device 20 and switch 22 are mounted to base 302. Although as shown switch 22 is mounted to base 302 it is also desirable to have switch 22 mounted to a switch bracket as shown previously in Fig. 4a and 4c. Switch button 438 is also shown in Fig. 5b which when depressed activates switch 22 through switch activator 442. Switch button 338 together with cover 304 defines the top exterior surface of housing 30 of pointing device 10. Fig. 5b also shows cable receiver 24 rotatably mounted to base 302 through spindle 434.

Fig. 5c is a planar cross-sectional view of an embodiment of rotary connector 401 disposed within cable receiver 24. Cable receiver 24 and spindle 434 have a mutual axis of rotation and spindle 434 is affixed to base 302. Cable receiver 24 is rotatably mounted to spindle 434. Disposed around the periphery of spindle 434 are a plurality of electrically conductive rings 474 that are electrically connected to connecting cable 406. Electrically engaging each ring 474 is electrically conductive wiper 476 that is connected to cable 18. Those skilled in the art will appreciate that there are numerous designs of rotary connectors that can also be utilized which fall within the scope and spirit of the present invention.

Fig. 5d is an end view of pointing device 10 according to the embodiment shown in Figs. 4a-b, showing thumb wheel 470 protruding through two slots in the side of base 302, allowing the user to wind and unwind cable 18.

Fig. 6a shows an alternate embodiment of the present invention where two transducers 510 are mounted on cable receiver 24 and tracking mechanism 520 is disposed within base 302 not attached to cable receiver 24. Cable 18 is connected to rotatable control circuit 572. Control circuitry on rotatable control circuit 572 processes the signal output by transducers 510 and then sends either to computer 12 or directly to display 14 signals controlling the direction and distance of cursor 16 movement on display 14. Fig. 6b shows detent 582 attached to cable receiver 24. Detent 582 mates with reference stop 584 formed in the inside surface of base 502. As mentioned in an earlier embodiment, detent 582 and reference 584 ensure that transducers 510 are in proper alignment with tracking mechanism 520 and housing 30. Encoder wheels 520 and 556 are axially mounted on encoder shafts 520 and 522 respectively which are rotatably supported by shaft supports 566. Preferably, shaft supports 566 extend upwardly from the interior bottom surface of base 302. Encoder wheels 554 and 556 and encoder shafts 520 and 522 are preferably formed together as single parts. Encoder shafts 520 and 522 are positioned perpendicular to each other within housing 30 and adjacent to ball 558. As ball 558 rotates, encoder shafts 520 and 522 rotate accordingly. The face of encoder wheel 554 is shown in Fig. 6c showing alternating reflective and non-reflective surfaces. An expanded perspective view showing the polygonal edge surface made up of n flat surfaces, where n typically is greater than 20 is shown in Fig. 6d. The greater the number n , the smaller the increments of both the direction of travel and the magnitude of travel of pointing device 10 can be distinguished. Preferably $n = 50$ to 70 , although n could be smaller or larger.

Transducers 510 as shown in Fig. 6a, each include a paired light-emitting element or LED 550 and light-detecting element or photodetector 552. Unlike more common electro-mechanical tracking devices which use encoder wheels that alternately transmit and then block light from LEDs 550 to photodetector 552, the embodiment of the present invention shown in Figs. 5a-5b uses encoder wheels 554

and 556 to alternately reflect and not reflect light from LEDs 550 to photodetector 552. This use of reflected light rather than transmitted light allows transducers 510 to rotate on cable receiver 24. As encoder wheel 554 rotates, light from LED 550 alternately reflects and does not reflect off the face of encoder wheel 554 as reflective segments 580 and then non-reflective segments 582 sweep by creating light pulses that photodetectors 552 convert into electrical pulse signals. Those skilled in the art will appreciate that there are numerous ways to create both reflective segments 580 and non-reflective segments 582. Preferably reflective segments 580 are made from a metal coating and non reflective segments 582 are made from slots formed in encoder wheel 554. Another example for reflective segment 580 would be multilayer non-metallic reflective coatings. Other examples for non-reflective segments 582 would be absorbing surfaces such as black or diffuse rough surfaces or some combination thereof.

As encoder wheel 556 rotates, light from LED 550 alternately reflects and does not reflect off the edge surface of encoder wheel 556 as reflective segments 580 and non-reflective segments 582 sweep by the light from LED 550. Those skilled in the art will appreciate that there are numerous ways to create both reflective segments 580 and non-reflective segments 582 for encoder wheel 556 and fall within the spirit and scope of the present invention. Preferably, reflective segments 580 are flat surfaces coated with a highly reflective metallic coating while non-reflective segments 582 are a roughened black surface which absorbs the majority of light and diffuses any remaining reflected light. Another example for reflective segments 580 would be multilayer non-metallic reflective coatings. Other examples for non-reflective segments 582 would be either a black surface or a roughened surface by themselves or a spoked wheel arrangement where there is no outer rim holding the spokes together.

Those skilled in the art will also readily recognize that various mechanical coupling schemes can be utilized to produce encoder wheels that are not directly attached to encoder shafts 520 and 522. It is also readily apparent to those skilled in the art that the same or similar mechanical coupling schemes can be utilized to produce encoder wheels which either both use the face surface or edge surface for

reflection rather than the mutually perpendicular encoder wheels shown in the embodiment shown in Figs. 6a-6b

5

What is claimed is:

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210

1. A pointing device capable of changing the appearance of a display, comprising:

a housing having a cover and a base;

5 a single spool cable receiver rotatably mounted to the housing;

a cable having a first end and a second end with the second end mounted to the cable receiver,

wherein the pointing device has a first mode with a first portion of the cable having a first length external to the pointing device and a second portion of the cable wound
10 around the cable receiver; and a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.

2. The pointing device of claim 1, wherein the pointing device has a third mode with a third portion of the cable having a third length external to the pointing device
15 less than the first length and greater than the second length.

3. The pointing device of claim 1, further comprising a switch which is activated to generate a pointing signal to the display.

20 4. The pointing device of claim 3, further comprising a switch which is capacitively coupled to the cable receiver.

5. The pointing device of claim 1, further comprising a tracking device which generates signals based on movement of the pointing device, the signals controlling
25 the movement of a reference on the display.

6. The pointing device of claim 5, further comprising a switch which is activated to generate a pointing signal to the display.

30 7. The pointing device of claim 5, wherein the tracking device is mounted to the cable receiver.

8. The pointing device of claim 7, further comprising:
a reference stop, and
a detent,

5 wherein the detent aligns the cable receiver to the housing.

9. The pointing device of claim 5, wherein the tracking device further comprises
an optical sensor for optically monitoring movement of the pointing device.

10 10. The pointing device of claim 1, further comprising:
a reference stop, and
a detent,

wherein the detent aligns the cable receiver to the housing.

15 11. The pointing device of claim 1, wherein the cable is shielded.

12. The pointing device of claim 1, wherein the cover further comprises a lid,
wherein the lid is disposed in an open position when the cable is being wound around
the cable receiver and the lid is disposed in a closed position when covering the cable
20 receiver.

13. The pointing device of claim 1, further comprising:
a rotatable disk affixed to the cable receiver,

25 wherein the cover further comprises an opening in the cover and the rotatable disk is
disposed within the opening in the cover;

wherein the rotatable disk has a rotatable disk top further comprising:

a depression formed in the exterior surface of the rotatable disk top, the
depression having a diameter; and

30 an aperture within the depression less than the diameter of the
depression.

14. The pointing device of claim 1, further comprising:
a connector attached to the cable at the first end, and
a connector receiver formed in the housing which accepts the connector.

5 15. The pointing device of claim 1, further comprising
a rotary connector coupling the cable to the tracking device.

16. The pointing device of claim 1, further comprising
a rotatable control circuit mounted to the cable receiver for producing position
10 signals in response to movement of the housing; and
a tracking mechanism disposed in the housing coupled to the rotatable control
circuit for generating signals in response to movement of the housing.

17. The pointing device of claim 16, further comprising:
15 a reference stop, and
a detent,
wherein the detent aligns the cable receiver to the base.

18. The pointing device of claim 16, wherein the rotatable control circuit further
20 comprises:
first and second transducers for receiving user commands indicating
movement of the housing and producing first and second position signals in response
thereto.

25 19. The pointing device of claim 18, wherein the tracking mechanism further
comprises: a first wheel with a polygonal outer surface rotatably mounted relative
to the housing; and
a second wheel rotatably mounted relative to the housing,
wherein the first transducer is operably coupled to the first wheel producing a first
30 signal and the second transducer is operably coupled to the second wheel producing a

second signal in response to rotation of the first and second wheels in response to movement of the housing.

20. The pointing device of claim 1, further comprising:

a rotatable disk mounted to the cable receiver; and
a slot in the housing, wherein the rotatable disk protrudes through the slot.

21. The pointing device of claim 1, further comprising:

a spring attached to the spool for rotating the spool in a first direction causing
the cable to wind onto the spool; and
a latching mechanism mounted to the housing.

22. A pointing device capable of changing the appearance of a display,
comprising:

a housing having a cover and a base;
a cable receiver rotatably mounted to the housing;
a cable having a first end and a second end with the second end mounted to the
cable receiver, where a majority of the cable is capable of being unwound from the
cable receiver,
wherein the pointing device has a first mode with a first portion of the cable having a
first length external to the pointing device and a second portion of the cable wound
around the cable receiver; and a second mode with the first portion of the cable having
a second length external to the pointing device less than the first length.

23. A pointing device capable of changing the appearance of a display,
comprising:

a housing having a cover and a base;
a cable receiver rotatably mounted to the housing;
a cable having a first end and a second end with the second end mounted to the
cable receiver, where the cable is essentially continuously wound in a first direction
around the cable receiver,

wherein the pointing device has a first mode with a first portion of the cable having a first length external to the pointing device and a second portion of the cable wound around the spool; and a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.

5

24. A system, comprising:

a computer;

a display, and

a pointing device, wherein the pointing device is capable of changing the

10

appearance of a display, the pointing device further comprising:

a housing having a cover and a base;

a single spool cable receiver rotatably mounted to the housing;

a cable having a first end and a second end with the second end mounted to the cable receiver,

15

wherein the pointing device has a first mode with a first portion of the cable having a first length external to the pointing device and a second portion of the cable wound around the cable receiver; and a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.

20

25. A system, comprising:

a computer;

a display, and

a pointing device, wherein the pointing device is capable of changing the appearance of a display, the pointing device further comprising:

25

a housing having a cover and a base;

a cable receiver movably coupled to the housing;

a cable having a first end and a second end with the second end mounted to the cable receiver;

a tracking device disposed within the housing;

30

a rotary connector coupling the cable to the tracking device,

wherein the pointing device has a first mode with a first portion of the cable having a first length external to the pointing device and a second portion of the cable wrapped around the cable receiver; and a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.

5

26. A system, comprising:

a computer;

a display, and

a pointing device, wherein the pointing device is capable of changing the

10 appearance of a display, the pointing device further comprising:

a housing having a cover and a base;

a cable receiver movably coupled to the housing;

a cable having a first end and a second end with the second end
mounted to the cable receiver;

15

a rotatable control circuit for producing position signals in response to
movement of the housing mounted to the cable receiver; and

a tracking mechanism for generating signals in response to movement
of the housing disposed in the housing,

20

wherein the pointing device has a first mode with a first portion of the
cable having a first length external to the pointing device and a second portion of the
cable wrapped around the cable receiver; and a second mode with the first portion of
the cable having a second length external to the pointing device less than the first
length.

25

27. A method for storing a cable with a connector in a housing containing a cable
receiver with a connector receiver and the connector coupled to a computer,
comprising the steps of:

disconnecting the cable from a computer;

opening the lid;

30

rotating the rotatable disk to wind the cable around the cable receiver;

inserting the connector into the connector receiver; and
closing the lid.

28. The method of claim 27, wherein the winding step further comprises the step
5 of inserting a stylus into an aperture and rotating the rotatable disk to wind the cable
around the cable receiver.

10005131

POINTING DEVICE WITH A CABLE STORAGE WINDING MECHANISM**ABSTRACT OF THE DISCLOSURE**

- 5 A pointing device, which is capable of changing the appearance of a display, includes a housing made up of a cover and a base, a single spool cable receiver rotatably mounted to the housing, and a cable having a first end and a second end with the second end mounted to the cable receiver. The pointing device has a first mode with a first portion of the cable having a first length external to the pointing device and a
- 10 second portion of the cable wound around the cable receiver. The pointing device also has a second mode with the first portion of the cable having a second length external to the pointing device less than the first length.
- 15

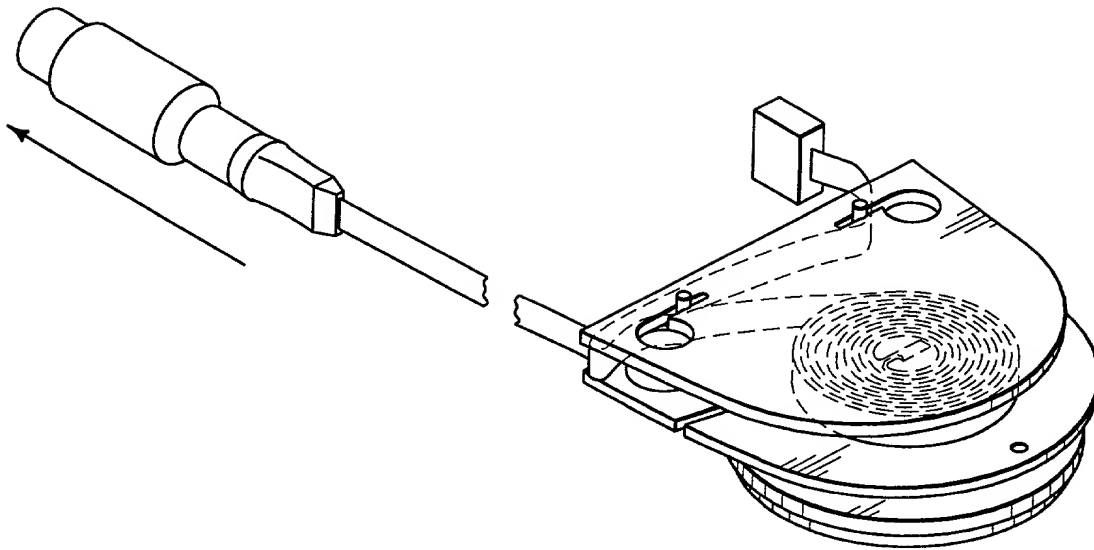


FIG. 1A
(PRIOR ART)

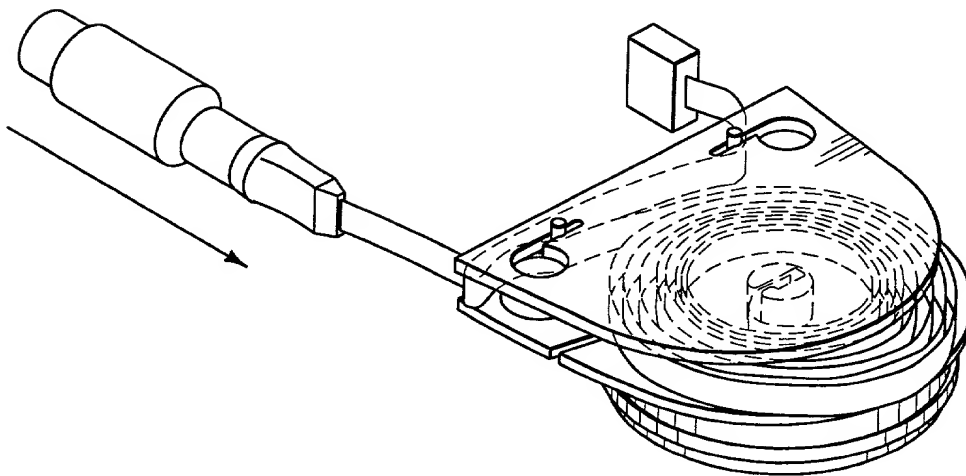


FIG. 1B
(PRIOR ART)

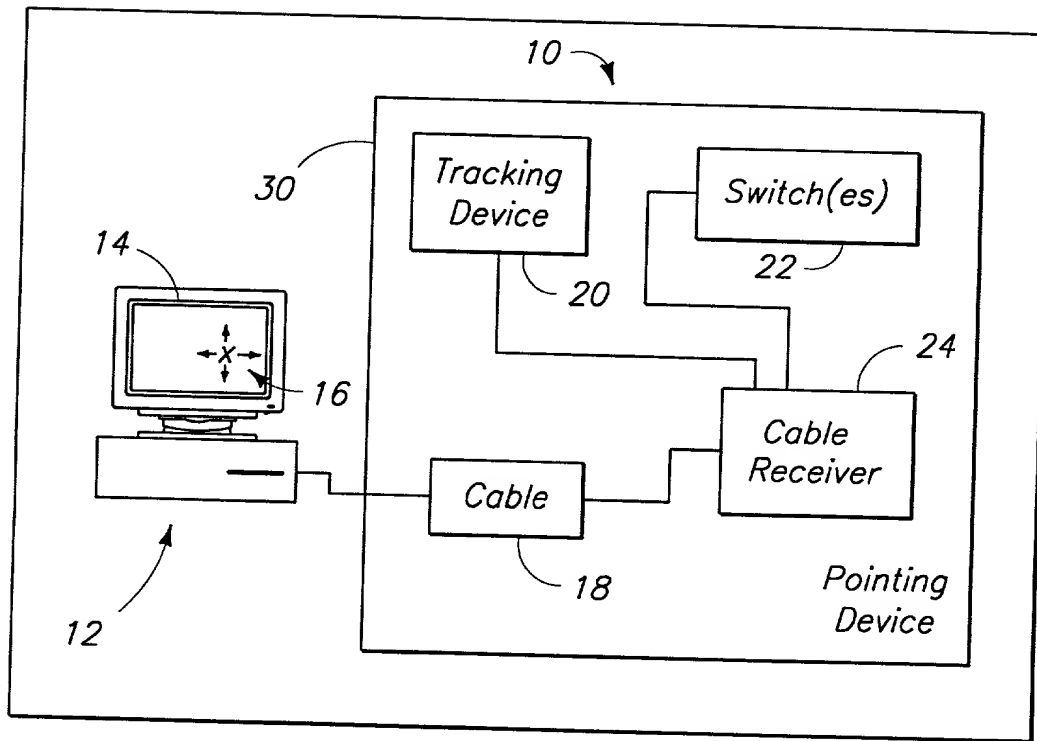


FIG. 2

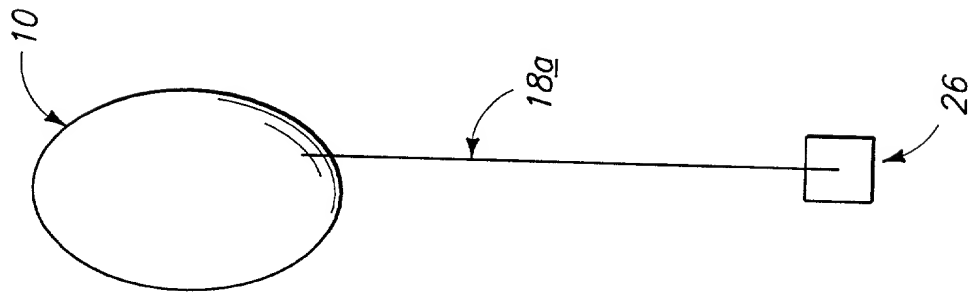


FIG. 3A

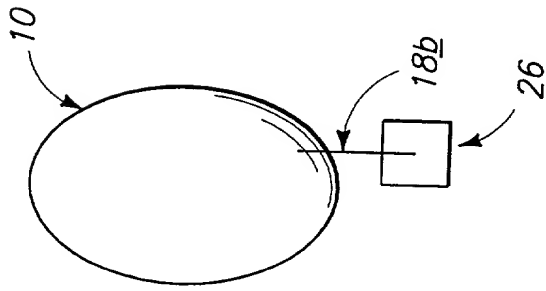


FIG. 3B

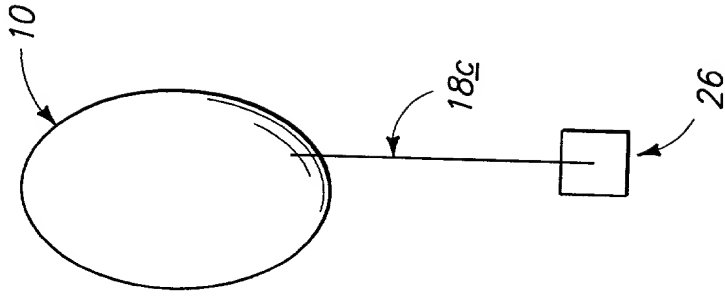


FIG. 3C

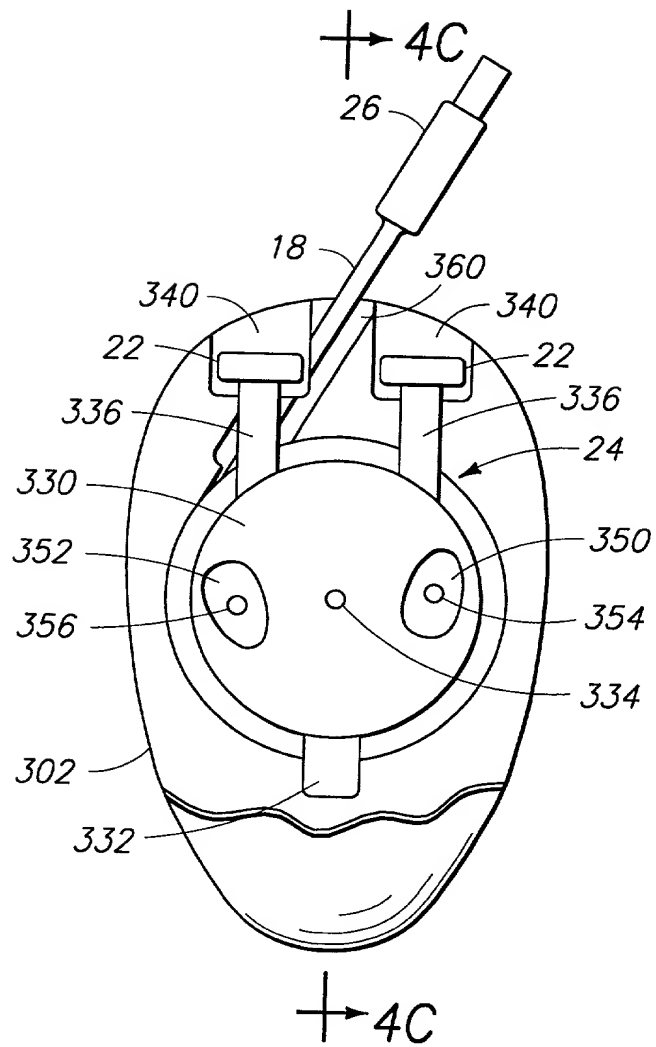


FIG. 4A





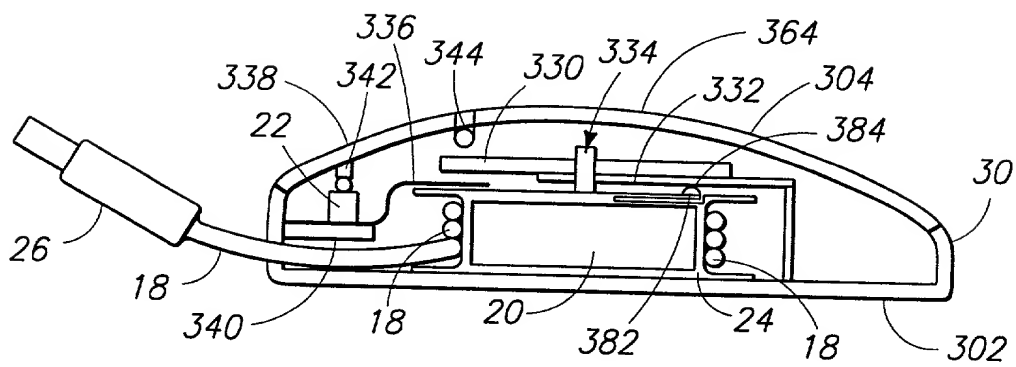


FIG. 4C

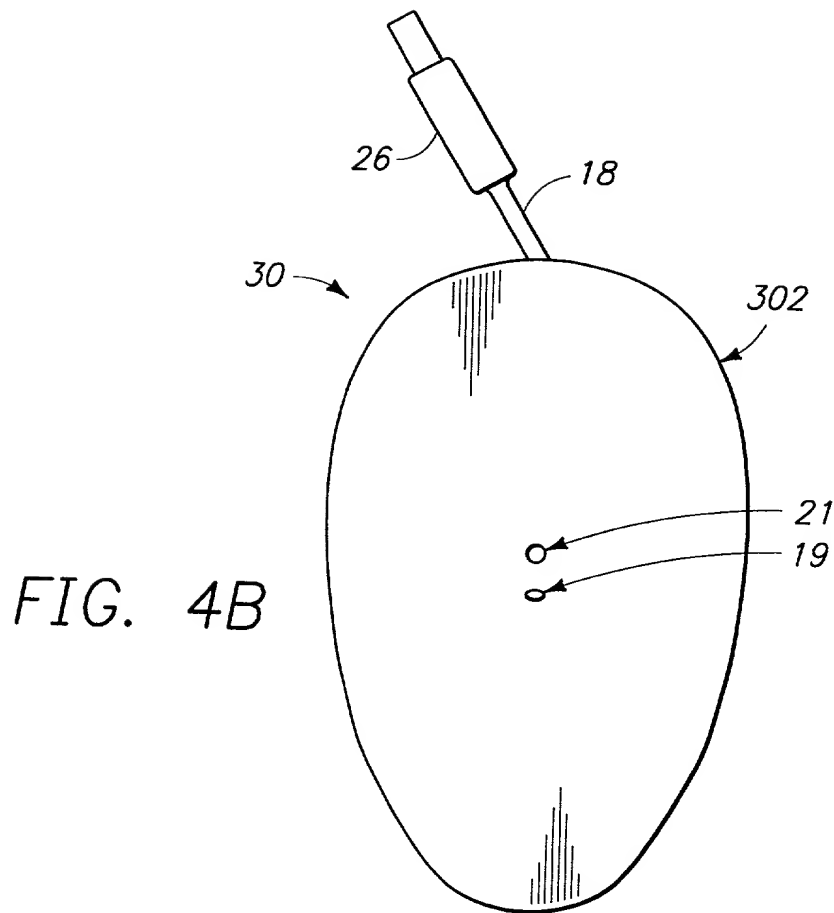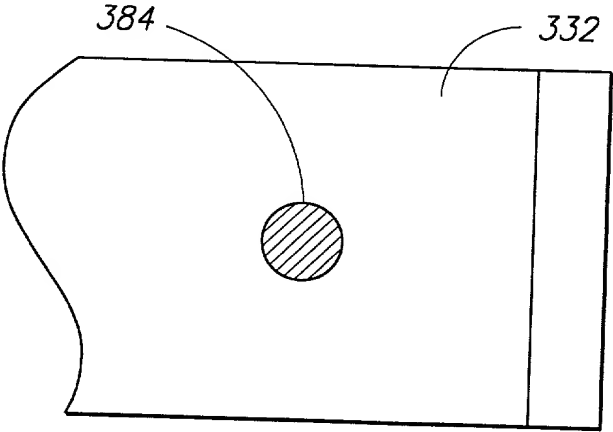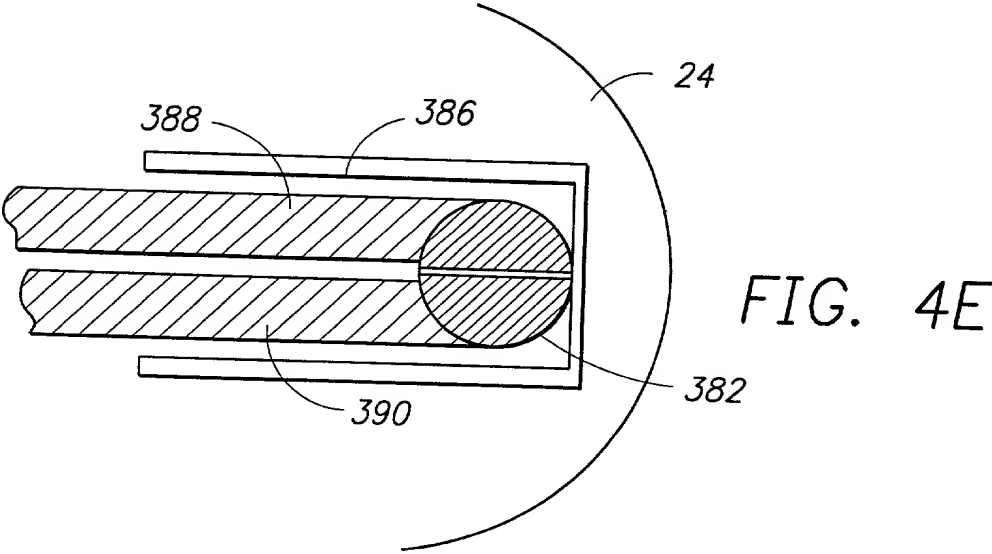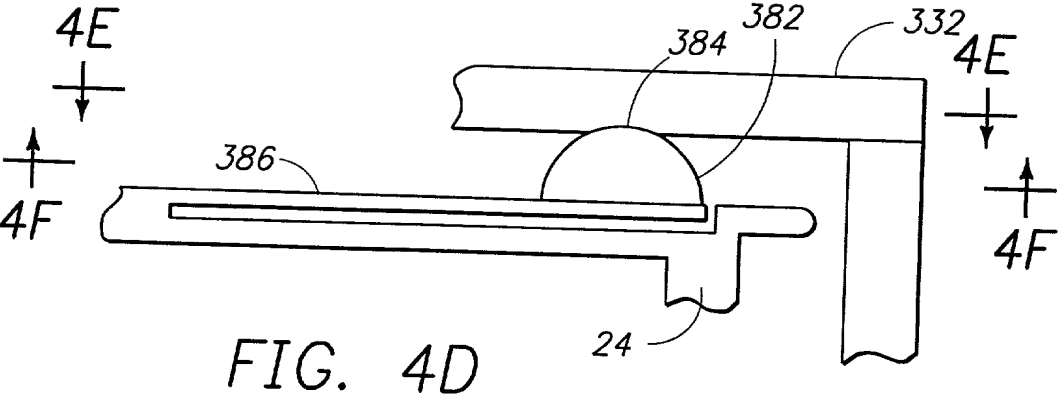

7/10

FIG. 5A

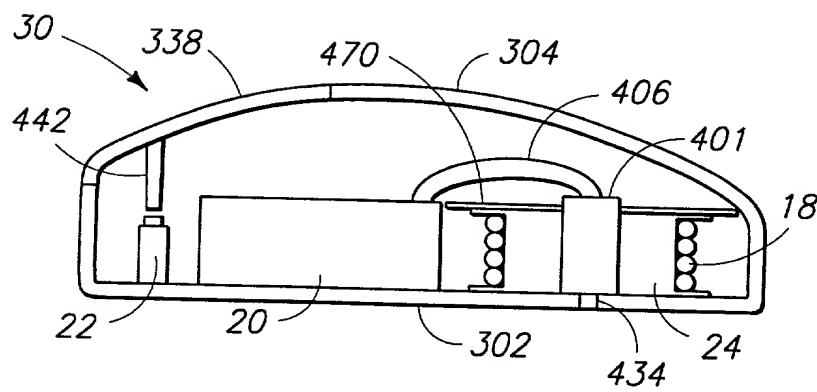
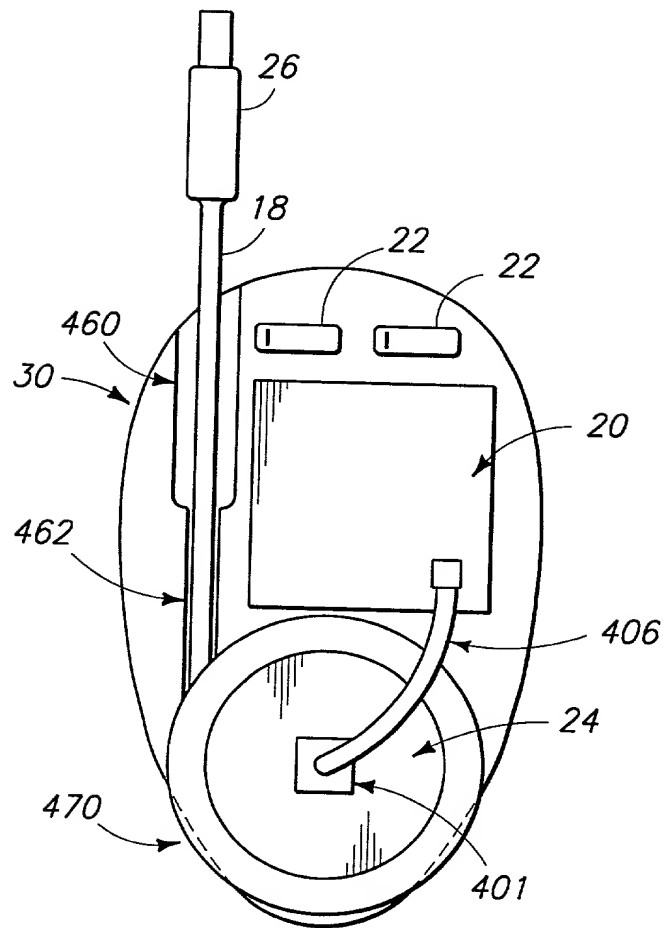


FIG. 5B

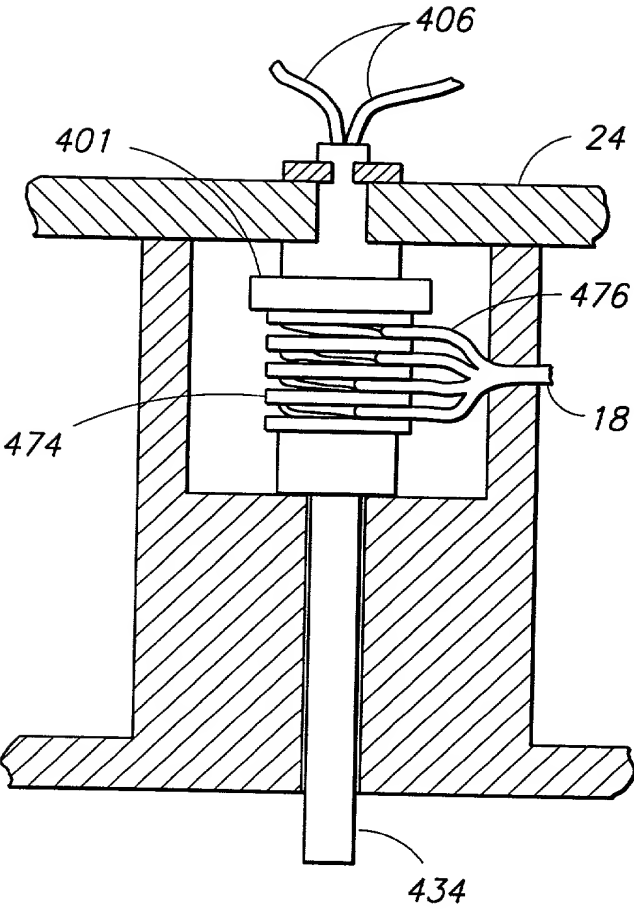


FIG. 5C

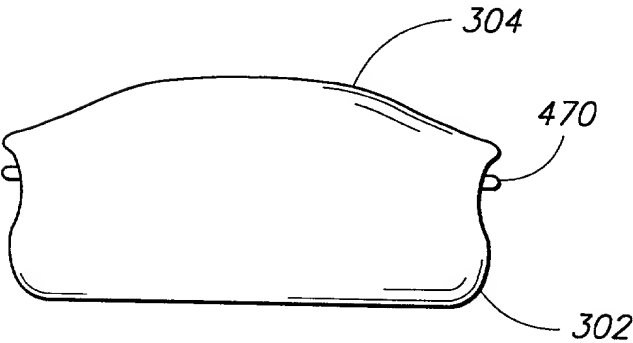


FIG. 5D

FIG. 6A

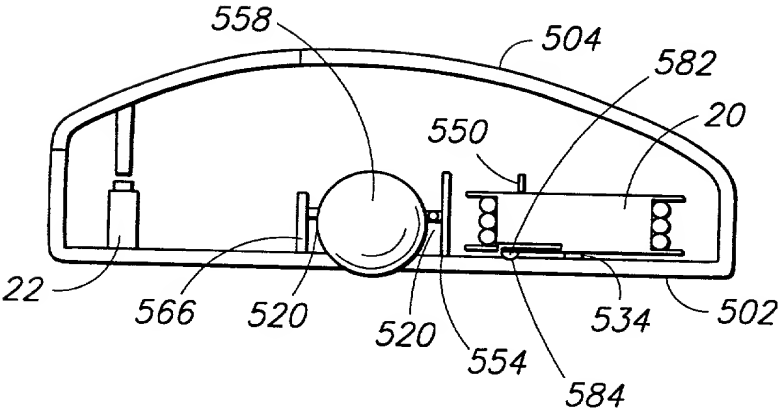
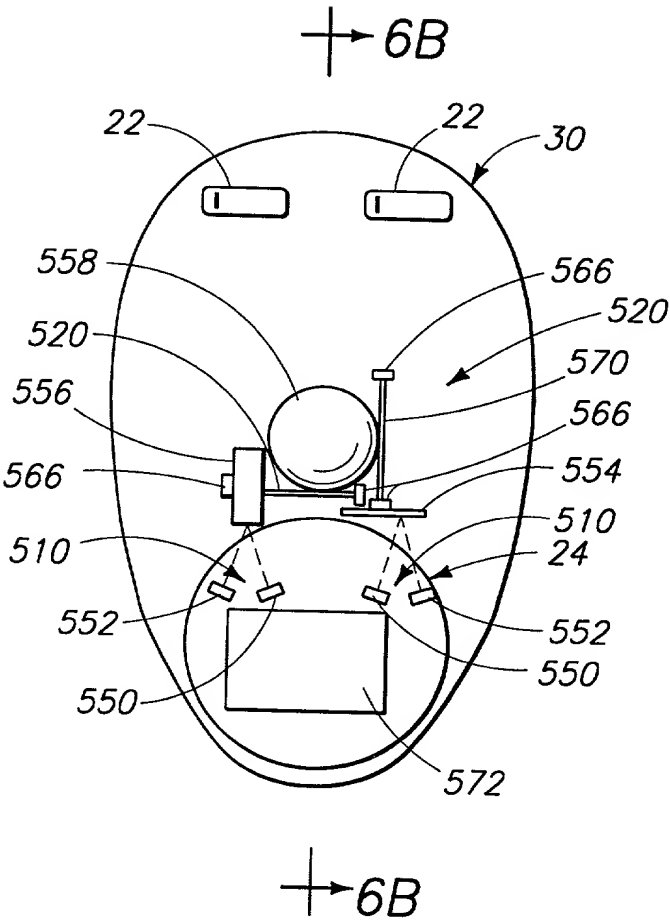
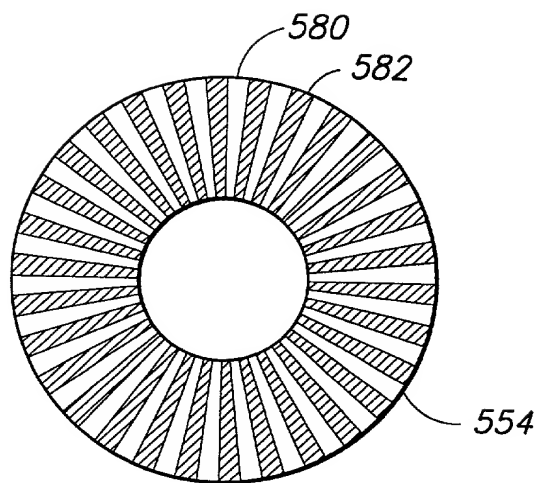
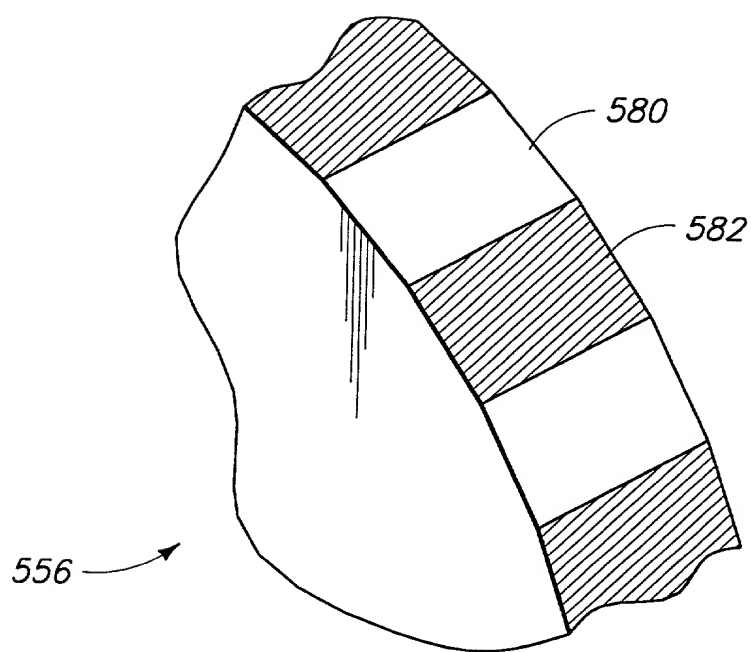


FIG. 6B

*FIG. 6C**FIG. 6D*

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**ATTORNEY DOCKET NO. 10005131-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Pointing Device With A Cable StorageWinding Mechanism

the specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

| COUNTRY | APPLICATION NUMBER | DATE FILED | PRIORITY CLAIMED UNDER 35 U.S.C. 119 |
|---------|--------------------|------------|--------------------------------------|
| | | | YES: _____ NO: _____ |
| | | | YES: _____ NO: _____ |

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

| APPLICATION SERIAL NUMBER | FILING DATE |
|---------------------------|-------------|
| | |
| | |

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

| APPLICATION SERIAL NUMBER | FILING DATE | STATUS (patented/pending/abandoned) |
|---------------------------|-------------|-------------------------------------|
| | | |
| | | |
| | | |

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Customer Number 022879Place Customer
Number Bar Code
Label hereSend Correspondence to:
HEWLETT-PACKARD COMPANY
Intellectual Property Administration
P.O. Box 272400
Fort Collins, Colorado 80527-2400

Direct Telephone Calls To:

Curtis G. Rose
(541) 715-8442

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: David L. Smith Citizenship: USResidence: 2925 NW Garryanna, Corvallis OR 97330Post Office Address: Same as residenceInventor's Signature David L. SmithDate 10/30/00

**DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION (continued)**

ATTORNEY DOCKET NO. 10005131-1

Full Name of # 2 joint inventor: Memphis Zhihong Yin Citizenship: CN

Residence: 2675 NE Lancaster, #152, Corvallis OR 97330

Post Office Address: Same as residence

Inventor's Signature [Signature] Date 10-30-2000

Full Name of # 3 joint inventor: Michael D. Derocher Citizenship: US

Residence: 4476 NW Snowbrush Drive, Corvallis OR 97330

Post Office Address: Same as residence

Inventor's Signature [Signature] Date 25 Oct 2000

Full Name of # 4 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 5 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 6 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 7 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____

Full Name of # 8 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature _____ Date _____